

THE HP-BT-SERIES AIR DRIVEN PUMP IS PERFECTLY DESIGNED FOR BOLT TENSIONING APPLICATIONS UTILISING RAYTORC BT-SERIES HYDRAULIC BOLT TENSIONERS AT 1500 BAR.

The HP-BT is a light weight single acting pump suited to applications where air is the preferred power source. Explosion Proof, no electrical power is require.



Air Consumption
28scfm at 100psi
6 to 7 Bar

Max Operating Pressure
1,600 Bar

BOLTING SOLUTIONS

**STAINLESS STEEL
BASE AND FRAME**

resists corrosion and allows for easy handling


**FILTER, REGULATOR
& LUBRICATOR
WITH GAUGE**

STEEL RESERVOIR

PRESSURE GAUGE
range is 0 - 1700 Bar

**PRESSURE
RELEASE VALVE**

OIL OUTLET

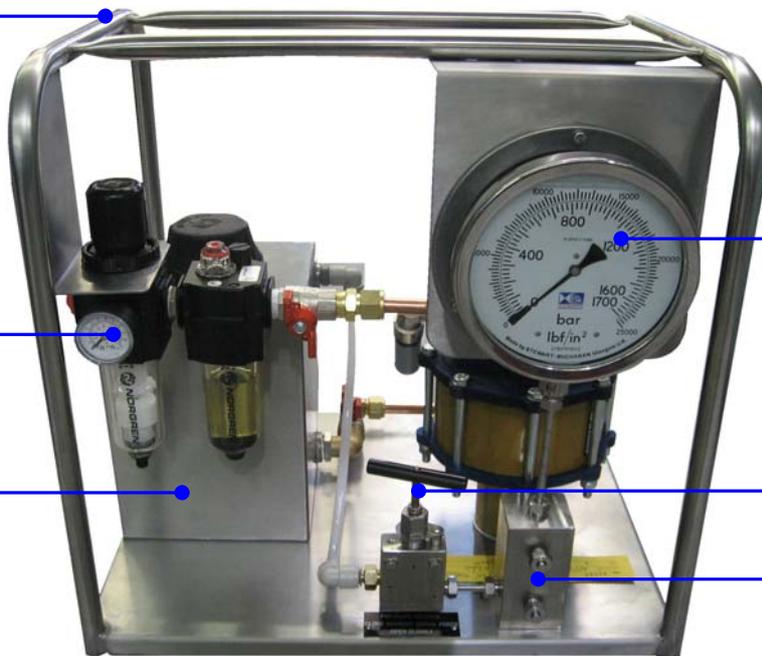

Model	Pressure Rating		Model Ratio	Oil Capacity	Dry Weight	Dimensions
	Bar	psi				
HP-BT	1500	21750	440	6 L	23 kg	42 x 42 x 60cm

HYDRAULIC FEED / LINK HOSES



Model	Length (M)	Description
BLH-1	1	Feed / Link hose set to suit bolt tensioners complete with male or female 116 couplers at both ends.1800 bar working pressure. 4500 bar min. burst.
BLH-1.5	1.5	
BLH-2	2	
BLH-3	3	
BLH-4	4	